
Product datasheet

HALOSTAR STARLITE 10 W 6 V G4

HALOSTAR STARLITE | Low-voltage halogen lamps with pin base



Areas of application

- General illumination
- Entrance lighting
- Accent lighting
- Lighting for reading
- Garden lighting
- Shops
- Restaurants, hotels and similar prestigious applications
- Offices, public buildings
- Outdoor applications only in suitable luminaires

Product benefits

- Brilliant accent light
- Incredibly small dimensions for revolutionary new luminaire designs
- Approved for use in open luminaires (to IEC 60598-1)
- Axial filament for optimum directional light
- Special pins for corrosion protection
- UV filter
- Contains no mercury

Product features

- Average life: 4,000 h
- 100 % dimmable
- Color rendering index R_a : 100

Technical data

Electrical data

Nominal wattage	10.00 W
Nominal voltage	6 V
Rated wattage	10.00 W
Power factor λ	1.00


Photometrical data

Nominal luminous flux	110 lm
Light color (designation)	Warm White
Rated luminous flux	110 lm
Rated color temperature	2700 K
Color rendering index Ra	100
Lumen main.fact.at end of nom.life time	0.80

Light technical data

Starting time	0.0 s
Warm-up time (60 %)	0.00 s

Dimensions & weight



Diameter	10.0 mm
Overall length	33.0 mm
Light center length (LCL)	22.0 mm
Length	33.0 mm
Outer bulb	T10
Maximum diameter	10.0 mm

Lifespan

Product datasheet

Rated lamp life time	4000 h
Number of switching cycles	100000

Additional product data

Base (standard designation)	G4
Mercury content	0.0 mg
Mercury-free	Yes

Capabilities

Burning position	Any
Dimmable	Yes


Certificates & standards

Energy efficiency class	C
Energy consumption	11 kWh/1000h

Country specific categorizations

ILCOS	HSGS/C/AXUB-10-6-G4-10/22
-------	---------------------------

Light Distribution

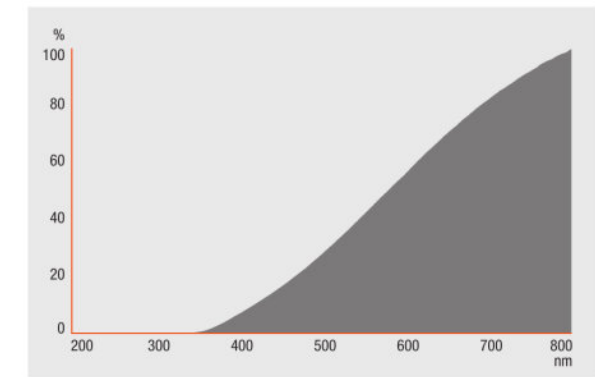

Spectral power distribution

Product datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300335131	HALOSTAR STARLITE 10 W 6 V G4	Shipping carton box 40 Pieces Folding carton box	144 mm x 107 mm x 121 mm	1.86 dm ³	167.80 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM GMBH is distribution partner
of LEDVANCE for Digital Lighting
Systems and Components

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany