

66440CBI

XENARC COOL BLUE INTENSE | Xenon headlight lamps



Areas of application

- Headlight

Product benefits

- Exceptionally bright
- Offers high contrast
- Up to 20 % more light (compared to conventional coated gas discharge lamps)

Product features

- Blue effect without coating
- Color temperature: up to 5,500 K

Product datasheet

Technical data


Electrical data

Nominal voltage	42.0 V
Nominal wattage	35.00 W
Test voltage	13.5 V

Photometrical data

Luminous flux	3200 lm
---------------	---------

Dimensions & weight

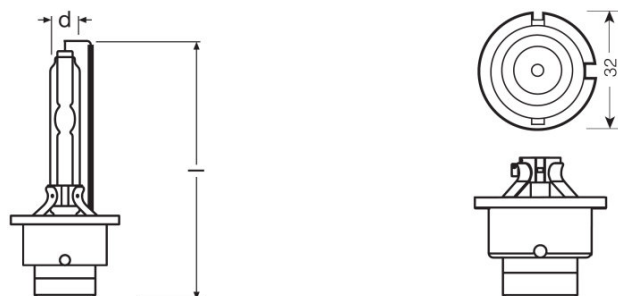

Length	77.0 mm
Diameter	9 mm
Product weight	16.00 g

Lifespan

Lifespan B3	2000 h
Lifespan Tc	3000 h

Additional product data

Base (standard designation)	P32d-5
-----------------------------	--------

Certificates & standards

ECE category	D4S ¹⁾
--------------	-------------------

¹⁾ To be operated only with approved electronic control gear

Country specific categorizations

Order reference	66440CBI 35W P3
-----------------	-----------------

Product datasheet

Safety advice

XENARC lamp change is recommended to be carried out by a professional.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899125582	66440CBI	Folding carton box 1	33 mm x 337 mm x 87 mm	0.97 dm ³	25.00 g
4052899125599	66440CBI	Shipping carton box 10	186 mm x 76 mm x 93 mm	1.31 dm ³	307.00 g
4052899125605	66440CBI	Shipping carton box 270	- x - x -		
4052899125612	66440CBI	Hard Cover Box 2	114 mm x 47 mm x 95 mm	0.51 dm ³	106.00 g
4052899125629	66440CBI	Shipping carton box 20	250 mm x 240 mm x 106 mm	6.36 dm ³	1200.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Legal advice

ECE approval

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.