2452MFX6

ORIGINAL | Lamps for printed circuit boards



Areas of application

- Instrument and switch lighting

Product benefits

- OEM Quality
- Wide product range
- Reliable quality

Product features

- Original spare parts

© 2016, OSRAM GmbH. All rights reserved.

Technical data


Electrical data

Power input	1.8 W
Nominal voltage	12.0 V
Nominal wattage	1.50 W
Power input tolerance	±10 %
Test voltage	13.5 V

Photometrical data

Luminous flux	6.5 lm
Luminous flux tolerance	±20 %

Dimensions & weight

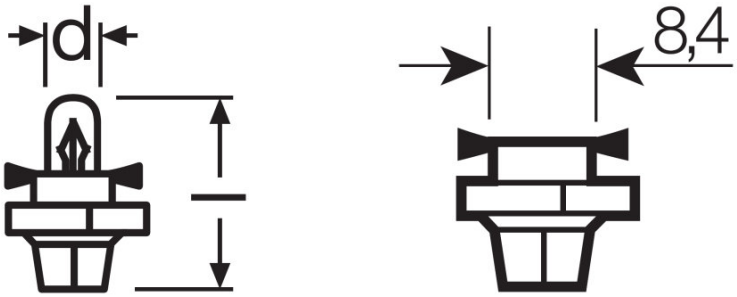

Length	17.5 mm
Diameter	5 mm
Product weight	0.76 g

Colors & materials

Base color	Beige

Lifespan

Lifespan B3	1700 h
Lifespan Tc	6500 h

Additional product data

Base (standard designation)	BX8.4d

Capabilities

© 2016, OSRAM GmbH. All rights reserved.

Thickness of PCB	1.25 mm

Certificates & standards

ECE category	-
Approval marks – approval	-

Country specific categorizations

Order reference	2452MFX6 1,5W 1

Country specific information

Product code	METEL code	SEG-No.	STK-Number	UK Org
4008321097118	OSRA2452MFX6	-	-	-

© 2016, OSRAM GmbH. All rights reserved.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321097118	2452MFX6	Unpacked 1	17 mm x 12 mm x 12 mm	0.00 dm^3	2.00 g
4008321097125	2452MFX6	Folding carton box 10	48 mm x 41 mm x 96 mm	0.19 dm^3	14.75 g
4008321097132	2452MFX6	Shipping carton box 50	148 mm x 55 mm x 115 mm	0.94 dm^3	122.50 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2016, OSRAM GmbH. All rights reserved.