


2473MFX6

ORIGINAL | Lamps for printed circuit boards

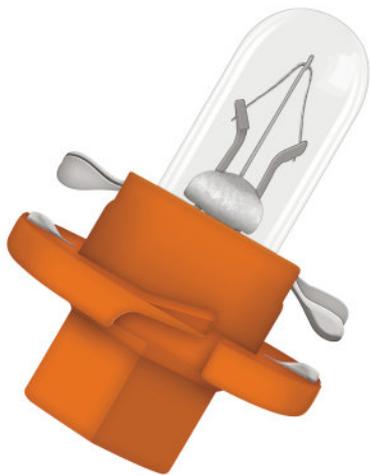

Areas of application

- Instrument and switch lighting

Product benefits

- OEM Quality
- Wide product range
- Reliable quality

Product features

- Original spare parts

Product datasheet

Technical data




Electrical data

Power input	1.12 W
Nominal voltage	12.0 V
Nominal wattage	1.10 W
Power input tolerance	±10 %
Test voltage	14.0 V

Photometrical data

Luminous flux	3.6 lm
Luminous flux tolerance	±25 %

Dimensions & weight



Length	17.5 mm
Diameter	5 mm
Product weight	0.74 g

Colors & materials

Base color	Pastel orange
------------	---------------

Lifespan

Lifespan B3	500 h
Lifespan Tc	5000 h

Additional product data

Base (standard designation)	BX8.4d
-----------------------------	--------

Capabilities

Product datasheet

Thickness of PCB	1.25 mm
------------------	---------

Certificates & standards

ECE category	-
Approval marks – approval	-

Country specific categorizations

Order reference	2473MFX6 1,1W 1
-----------------	-----------------

Country specific information

Product code	METEL code	SEG-No.	STK-Number	UK Org
4008321096821	OSRA2473MFX6	-	-	-

Product datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321096821	2473MFX6	Unpacked 1	18 mm x 7 mm x 11 mm	0.00 dm ³	1.00 g
4008321096838	2473MFX6	Folding carton box 10	26 mm x 46 mm x 113 mm	0.14 dm ³	20.33 g
4008321096845	2473MFX6	Shipping carton box 50	129 mm x 55 mm x 140 mm	0.99 dm ³	122.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.