

SP_SSL_9645CW 13W 12V PY20D CustomerInf RL 2016-11-08

9C1 3445197-EN-00

Released

SP SSL&EL München / Traunreut 700

ECM

Johannes Schreyer AMW


Template: ZOT 10000028

External no.:

Page 1 of 2

OSRAM GmbH: Chairman of the Supervisory Board: Peter Bauer; Managing Directors: Dr. Olaf Berlien (Chairman), Dr. Stefan Kampmann;
 Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-No. DE 71568000

Drawing (Zeichnung) – Measures in mm (Maße in mm)

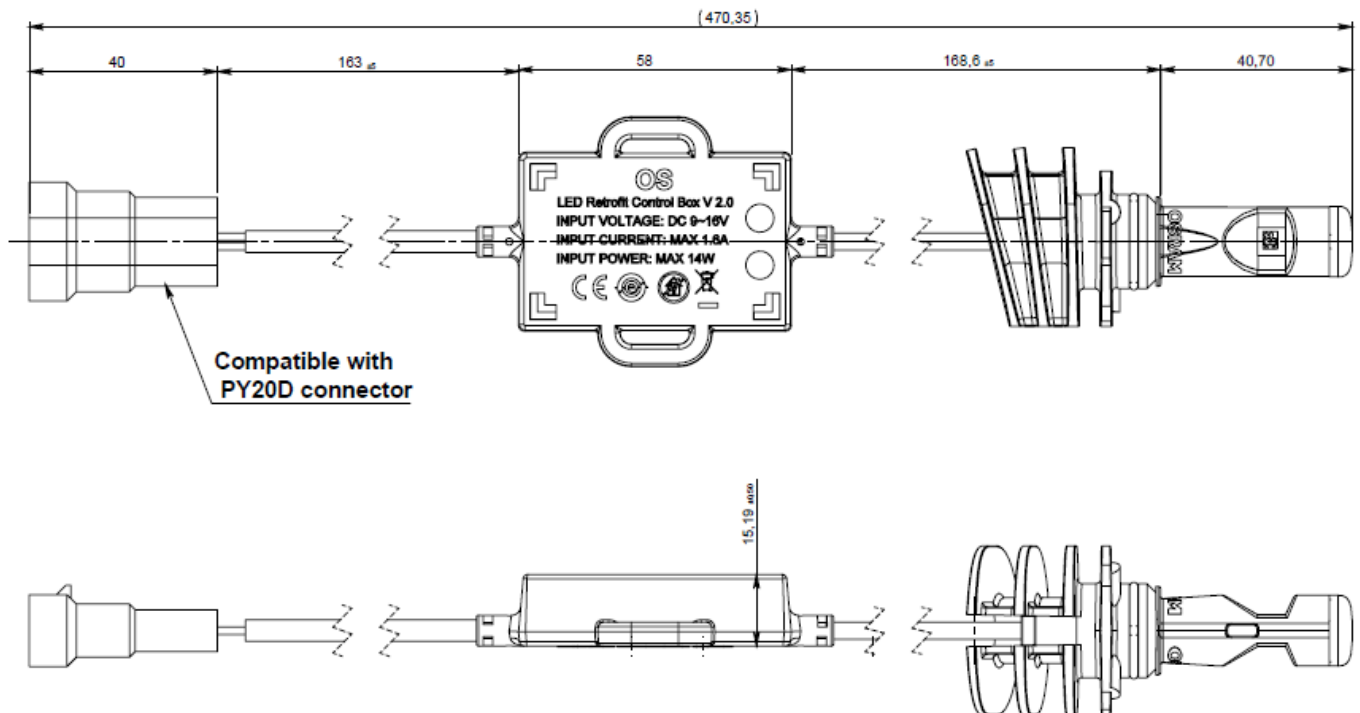

1) Base: compatible with PY20D

General tolerances in accordance with ISO 2768-m (Allgemeine Toleranzen nach ISO 2768-m)

Standards and regulations (Normen und Vorschriften)

Eye Safety	Risk2 (IEC TR 62778 / 62471)
------------	------------------------------

Electrical and photometrical data (Elektrische und lichttechnische Daten)

Characteristics (Messwert)	Symbol	Unit (Einheit)	Major / Minor	Tolerance (Toleranz) [%]
Voltage (Spannung)	U	V	13,5	
Wattage (Leistung)	P	W	11,22	±10%
Luminous flux @ 30 Seconds (Lichtstrom)	Φ	lm	830	±25%
Steady State luminous flux (Lichtstrom)	Φ	lm	730	±25%

SP_SSL_9645CW 13W 12V PY20D CustomerInf RL 2016-11-08

9C1 3445197-EN-00

Released

SP SSL&EL München / Traunreut 700

ECM

Johannes Schreyer AMW

Template: ZOT 10000028

External no.:

Page 2 of 2

OSRAM GmbH: Chairman of the Supervisory Board: Peter Bauer; Managing Directors: Dr. Olaf Berlien (Chairman), Dr. Stefan Kampmann;
 Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-No. DE 71568000

Life time (Lebensdauer)

Test (Prüfung)				
Running Voltage (Brennspannung) 13,5 V ¹⁾	L70B10	h	2.500	
	L70 T _C	h	5.000	

¹⁾ Test conditions (Prüfbedingungen)

Horizontal continuous free burning @ T ambient of 25°C

Further specifications (Weitere Spezifikationen)

Test (Prüfung)	Rated value (Sollwert)	Test specification (Norm)
Color temperature (Farbtemperatur)	Cold White (typical 5800K)	-

Process of manufacturing (Fertigungsprozess)

This product is designed and manufactured for the Automotive Aftermarket, but might also be used for OES business depending on the customer requirements. Please consider the product specification to match the customer requirements. Dieses Produkt wurde für den Aftermarket entwickelt und produziert. In Abhängigkeit der Kundenanforderungen, kann dieses jedoch auch für das OES Geschäft genutzt werden. Es ist unabdingbar, die Produktspezifikation mit den Kundenanforderungen abzugleichen.

Successive listing of changes (Änderungsfortschreibung)

Issue (Ausgabe):	Reason for change (Änderungsgrund):