

36 mm Blue

LEDiving STANDARD | – Suitable replacement for Festoon



Areas of application

- Interior lighting

Product benefits

- 3 year guarantee
- Two different light colors for a variety of customization options
- Maintenance-free thanks to long lifetime
- Easy plug and play replacement
- Compatible with conventional festoon lamp base

Product features

- LED retrofit lamps for various applications in vehicle interiors
- Available with color temperature: 6,000 K, 6,700 K
- Available with light color: Cool White, Sky White
- Available with length: 31 mm, 36 mm, 41 mm
- Shockproof and vibration-proof


Product datasheet

Technical data

Electrical data

Nominal voltage	12.0 V
Nominal wattage	0.50 W

Dimensions & weight

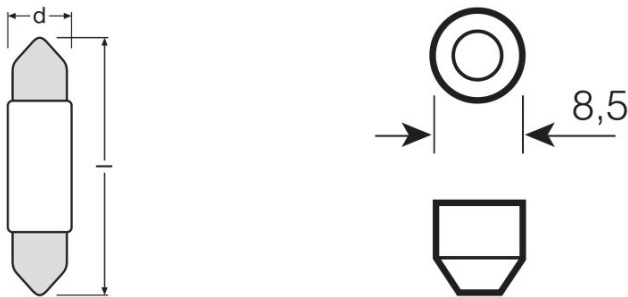

Length	36.0 mm
Diameter	9.8 mm
Product weight	2.50 g

Additional product data

Base (standard designation)	SV8.5-8
-----------------------------	---------

Certificates & standards

ECE category	C5W
--------------	-----

Country specific categorizations

Order reference	6436BL-01B 0,5W
-----------------	-----------------

Product datasheet



Others graphics

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899358157	36 mm Blue	Blister 1	101 mm x 74 mm x 13 mm	0.10 dm ³	12.90 g
4052899358164	36 mm Blue	Shipping carton box 5	71 mm x 104 mm x 146 mm	1.08 dm ³	98.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

Guarantee terms are available at

► www.osram.com/am-guarantee

Legal advice

Not ECE conform

Only approved for off-road use. Any use on public road traffic leads to cancellation of vehicle operating licence and loss of insurance cover.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.