

LEDDriving SL W21/5W

Ideal replacement for any vehicle




Different light colors for various applications

Available in Cool White, Amber and Red




High brightness

High light intensity thanks to powerful LEDs and solid thermal management



Matches W21W lamps

Upgrade to LED with simple plug & play replacement

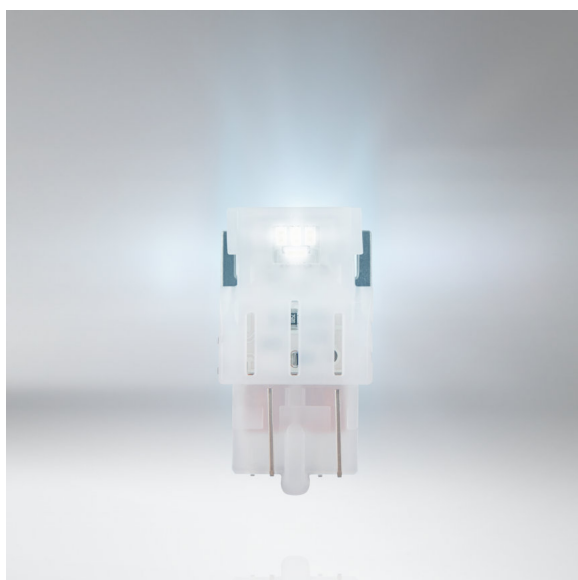

Suitable LED replacement for W21W

With the LEDDriving STANDARD W21W retrofit lamps, OSRAM offers a suitable LED replacement for conventional W21W lamp types. With up to 80% less energy consumption in comparison to standard lamps, LEDDriving STANDARD provide a long lifetime. Due to three different light colors (Cool White, Amber, Red) the lamps can be used for various vehicle exterior applications. OSRAM provides a 3 year guarantee for this product. These products are not ECE-approved and must not be used on public roads in any exterior application. Use on public roads will invalidate both the operating license and insurance coverage. Some countries prohibit the sale and use of these products. Please contact your local distributor for information on your country.

Technical data

Product information

Order reference	7716CW
Product type (off-road vs. on-road)	Off-road $\triangleq$ W21/5W
Application (Category and Product specific)	Mainly used for signal/ indicator applications


Electrical data

Power input	2.50 / 0.5 W
Nominal voltage	12.0 V
Nominal wattage	2.00/0.40 W
Power input tolerance	± 25 %
Test voltage	13.5 V

Photometrical data

Color temperature	6000 K
Luminous flux	154/27 lm
Luminous flux tolerance	± 15 %
Light color LED	Cool white

Dimensions & weight



Length	47.5 mm
Diameter	20.0 mm
Product weight	12.00 g

Lifespan

Lifespan B3	1500 h
Lifespan Tc	4000 h
Guarantee	4 years

Product datasheet

Additional product data

Base (standard designation)	W3x16q
-----------------------------	--------

Capabilities

Technology	LED
------------	-----

Country specific categorizations

Order reference	7716CW
-----------------	--------

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899520455	LEDiving SL $\triangle$ W21/5W	Blister 2	135 mm x 95 mm x 18 mm	0.23 dm ³	36.42 g
4052899520462	LEDiving SL $\triangle$ W21/5W	Shipping carton box 10	115 mm x 105 mm x 145 mm	1.75 dm ³	215.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

File	
	Brochures Sales Folder LEDiving replacement lamps (EN)
	Brochures LEDiving Retrofits - Exchange overview (EN)
	Brochures 618438_LEDiving RETROFIT application overview (EN)
	360 Degree Image LEDiving SL W215W 7515DWP-02B

Legal advice

These products are not ECE-approved and must not be used on public roads in any exterior application.

Use on public roads will invalidate both the operating license and insurance coverage.

Some countries prohibit the sale and use of these products. Please contact your local distributor for information on your country.

References / Links

Guarantee terms are available at www.osram.com/am-guarantee

Product datasheet

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.



OSRAM